


# BELKIN®



## OmniView® Dual User CAT5 KVM Switch

Belkin's OmniView CAT5 KVM switching solutions are designed to meet the needs of IT professionals in small to medium business environments. Leveraging CAT5 cabling technology, this product suite reduces cable clutter, provides reliable connectivity, and allows administrators to manage multi-platform servers at distances up to 100' away from the switch. Backed by Belkin's tradition of innovation and quality, OmniView CAT5 KVM switches offer a comprehensive feature set and best-in-class value.

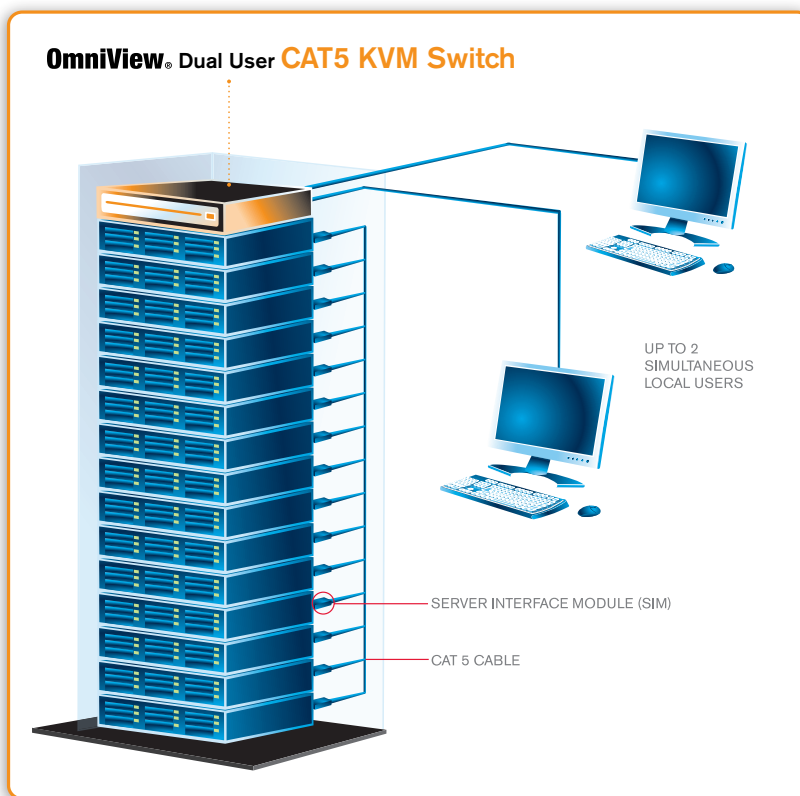

### ▶ Dual User CAT5 KVM Features:

#### **Multi-User Access**

Up to 2 simultaneous local users

#### **Advanced OSD**

On-screen display (OSD) provides graphical interface for switching between systems, allowing user to assign specific names to designated ports

#### **CAT5 Cabling Technology**

Extend servers up to 100' from the KVM switch to accommodate any computing environment, while minimizing cable clutter with Cat5-based connectivity

#### **Keep-Alive Intelligence**

Server Interface Module (SIM) technology ensures consistent keyboard/mouse emulation

#### **Multi-Platform Support**

Support for USB, PS/2, and SUN platforms

#### **Superior Video Performance**

1600x1200 resolution capability ensures compatibility with high-performance server solutions

#### **Field Upgradeable**


Flash upgrade capability extends overall product life cycle and provides upgrade capabilities for future platform support

#### **2-year Warranty**

Belkin's assurance | **Quality. Service. Value.**

## Package Contents

- 1 x OmniView CAT5 216/232 KVM Switch
- 1 x AC Power Cable
- 1 x User Manual CD
- 1 x Quick-Start Guide
- 1 x Rack-Mount Bracket and Screws

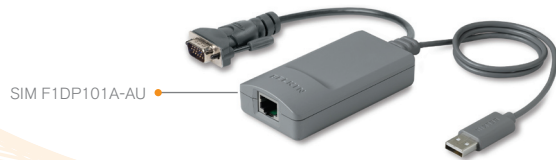

PART NUMBER	DESCRIPTION
F1DP216A	OmniView 2-User, 16-Port KVM Switch
F1DP232A	OmniView 2-User, 32-Port KVM Switch

### SERVER INTERFACE MODULES (SIMS)

F1DP101A-AP	VGA, PS/2
F1DP101A-AU	VGA, USB (SUN USB Support)
F1DP101A-AP-8PK	VGA, PS/2 8-Pack
F1DP101A-AU-8PK	VGA, USB 8-Pack

### RELATED PRODUCTS

F1DC101P-SR	17" LCD Rack Console – 1U – Single Rail
F1DC101P-DR	17" LCD Rack Console – 1U – Dual Rail
F1DC102P-SR	19" LCD Rack Console – 1U – Single Rail

## Product Specifications

	OmniView CAT5 216	OmniView CAT5 232
<b>Part Number</b>	<b>F1DP216A</b>	<b>F1DP232A</b>
<b>Number of Ports</b>	16	32
<b>Number of Users Supported</b>	2 local	2 local
<b>Maximum Resolution</b>	1600x1200@85Hz	1600x1200@85Hz
<b>Console Connection</b>	USB, VGA	USB, VGA
<b>Expansion</b>	Cascading	Cascading
<b>Server Connections</b>	Cat5-based connectivity; Server Interface Module (SIM) for PS/2 and USB systems	Cat5-based connectivity; Server Interface Module (SIM) for PS/2 and USB systems
<b>Dimensions</b>	17" W x 1.7" H x 10.6" D (431 x 44 x 270 mm)	17" W x 1.7" H x 10.6" D (431 x 44 x 270 mm)
<b>Weight</b>	5.165 lbs (2.343 kg)	5.165 lbs (2.343 kg)
<b>Power/Environment</b>		
<b>Power Supply</b>	100 - 240 VAC 50 / 60 Hz	100 - 240 VAC 50 / 60 Hz
<b>Operating Temperature</b>	32° to 104° F (0° to 40° C)	32° to 104° F (0° to 40° C)
<b>Storage Temperature</b>	-40° to 158° F (-40° to 70° C)	-40° to 158° F (-40° to 70° C)
<b>Humidity</b>	80% non-condensing relative humidity	80% non-condensing relative humidity
<b>Warranty</b>	2 years	2 years

Note: Specifications are subject to change without notice.

**BELKIN**<sup>®</sup>  
www.belkin.com/kvm

**Belkin International, Inc.**  
Los Angeles, CA 90220, USA  
310.898.1100

**Belkin Ltd.**  
Rushden, United Kingdom  
+44 (0) 1933 35 2000

**Belkin Ltd.**  
Tuggerah, Australia  
+61 (0) 2 4350 4600