



Dual-User PRO3 KVM Switch


## Control multiple USB and PS/2 servers with two different consoles simultaneously

The OmniView Dual-User PRO3 USB & PS/2 KVM Switch provides easy and dependable server management by two concurrent administrators. The Switch enables two network administrators to monitor and control up to eight, or 16, USB- and PS/2-platform servers from two different consoles, simultaneously! No other KVM switch provides such an impressive set of features and value price. The PRO Series KVM Switches are the industry's most popular KVM switches for small to medium server rooms, branch locations, and test and development labs. Designed to grow along with your server network, the Switch can be daisy-chained together with other Dual-User PRO3 Switches to support up to 128 servers.

### Front View



### Back View

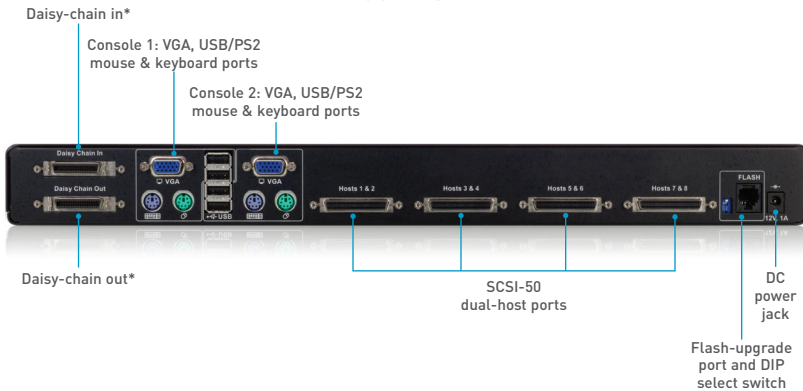

\*Daisy-chain ports on Dual-User PRO3 KVM Switch only connect to other Dual-User PRO3 KVM Switches.



## The Dual-User PRO3 KVM Switch features:

- **Dual-User Connectivity** allows two administrators to access the KVM Switch simultaneously and communicate with servers connected to the Switch
- **USB & PS/2 Connection** offers expanded connectivity in a mixed server environment
- **On-Screen Display (OSD)** simplifies server management and allows you to assign names and switch to each connected server
- **Dedicated Daisy-Chain Ports** let you easily expand your KVM configuration, without sacrificing available CPU ports
- **Hot Keys** allow you to easily switch servers using a sequence on your keyboard
- **AutoScan** lets you scan and monitor the activities of all connected servers
- **Flash-Upgradable Firmware** ensures compatibility with the latest hardware
- **1U Design** allows for desktop or rack-mountable installation

## Specifications

Model No.	F1DA208Z	F1DA216Z
No. of Users Supported	2	2
No. of Computers Supported	8	16
Dimensions	17.25 x 3.5 x 7.5 in. (438mm x 89mm x 190mm)	17.25 x 3.5 x 7.5 in. (438mm x 89mm x 190mm)
Weight	9.2 lbs. (4.2kg.)	12.0 lbs. (5.5kg.)
Enclosure	Metal with high-impact plastic faceplate	
Specifications		
Ports	USB & PS/2	
Monitor Supported	VGA and SVGA MultiSync® LCD	
Max Resolution	Up to 1920x1440@75Hz	
Keyboard/Mouse Input	USB (Type A), PS/2 (miniDIN6)	
Monitor Port	VGA (HDDB15)	
CPU Port	SCSI-50	
Daisy-Chain Ports	SCSI-36 female	
Direct-Port Selectors	8 and 16 respectively for 8- and 16-port models	
Flash-Upgrade Port	RJ11	
KVM Cables Included	No	
Power/Environment		
Power Requirements	12V, 1A power adapter with center pin-positive polarity	
Operating Temperature	32° to 104° F (0 to 40° C)	
Storage Temperature	-4° to 140° F (-20 to 60° C)	
Humidity	0-80% RH, non-condensing	
Warranty		
3 years		

Note: Specifications are subject to change without notice.



## Package Contents

- OmniView Dual-User PRO3 KVM Switch
- Rack-Mount Bracket with Screws
- 12V DC, 1A Power Supply
- DB9-to-RJ11 Serial Flash Cable
- User Manual CD
- Quick Installation Guide

## Required Cables

- F1D9401-06 Dual-Port KVM Cable, 6 ft., USB
- F1D9401-12 Dual-Port KVM Cable, 12 ft., USB
- F1D9400-06 Dual-Port KVM Cable, 6 ft., PS/2
- F1D9400-10 Dual-Port KVM Cable, 10 ft., PS/2
- F1D9400-15 Dual-Port KVM Cable, 15 ft., PS/2
- F1D9400-25 Dual-Port KVM Cable, 25 ft., PS/2

Part Number	Description	UPC
F1DA208Z	OmniView Dual-User PRO3 USB & PS/2 KVM Switch	7-22868-66086-7
F1DA216Z	OmniView Dual-User PRO3 USB & PS/2 KVM Switch	7-22868-66087-4